


REVISIONS

ISS SYMBOL	DESCRIPTION\DATE
A1	由AA2840-BGTG001 型號轉來 \03/29/07'

FOR CUSTOMER

REMARK: RoHS COMPLIANT  
(符合 RoHS)

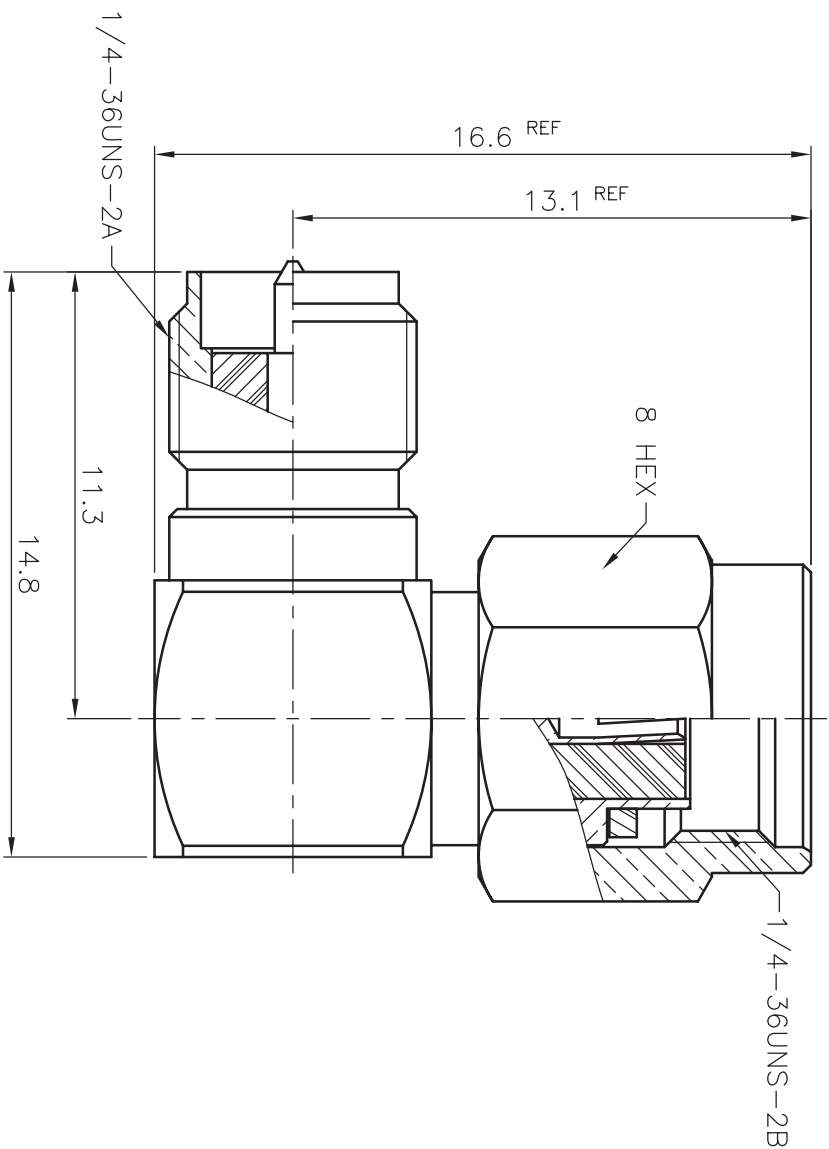

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. TEFLON MIL-P-19468
  5. BERYLLIUM COPPER PER QQ-C-530

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A1
	SHELL	NOTE 1	NOTE 2			DIMENSIONS ARE IN MILLIMETERS			
	C RING	NOTE 5	NONE			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)			
	GASKET	SILICONE	RED			0.5~6 = ±0.2			
	INSULATOR	NOTE 4	WHITE			>6~30 = ±0.4			
	BODY	NOTE 1	NOTE 2			>30~120 = ±0.6			
	CONTACT PIN	NOTE 5	NOTE 3			>120~315 = ±1			
	CUBE BODY	NOTE 1	NOTE 2			>315~1000 = ±1.6			
	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	5/1	ISSUE	A1
						PART NO.			
						APPROVED		DATE	
						CHECKED		DATE	
						DRAWN		DATE	
						TITLE			
						DRAWING NO.		2858NR500BD000B	
						FILE NO.		Z:\NND\2858\NR\500\000\2858NR500BD000B-A1	

**PROFESSOR CO., INC.**  
普樂國際股份有限公司

SMA R/A R/P PLUG TO R/P JACK  
ADAPTOR