REVISION		
ISS	ZONE	DESCRIPTION
A-1		設計變更 (RD990804)
A-2		設計變更 (RD991226)

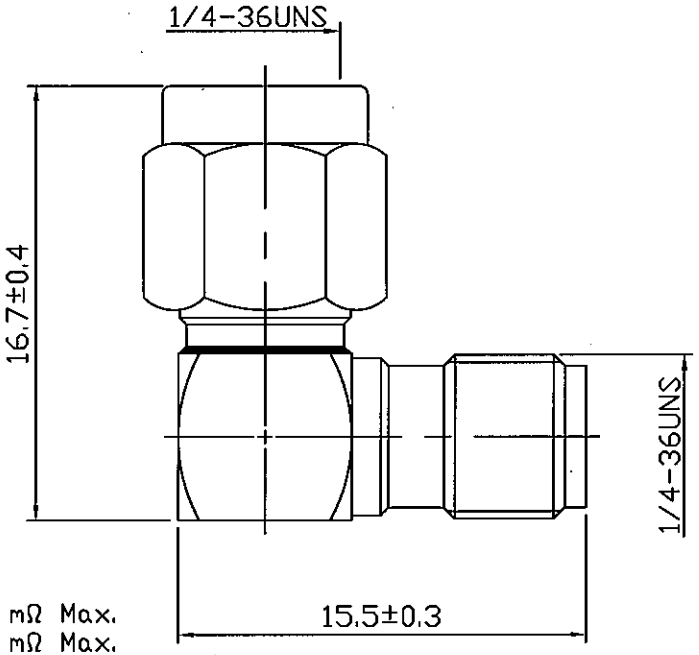

NOTE:
1. Impedance: 50Ω
2. Frequency Range: DC 0-18 GHz
3. V.S.W.R.: 1.42 MAX.
4. Voltage Rating: 750V rms
5. Contact Resistance: Center Contacts: 2.0 mΩ Max.
   Outer Contacts: 2.0 mΩ Max.
6. Insulation Resistance: 5000 MΩ MIN.
7. Connector Intertface PER: MIL-STD 348A
8. Operating Temperature Range: -65°~165°C
9. ROHS Compliance.

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWN NO.
10	COVER	BRASS	GOLD	1	M-0009
9	BODY B	BRASS	GOLD	1	B-0887
8	INSULATOR B	TEFLON	NONE	1	T-0533
7	CENTER CONTACT B	Be Cu	GOLD	1	C-0333
6	BODY A	BRASS	GOLD	1	B-0734
5	WASHER	STEEL	NONE	1	G-0002
4	GASKET	SILICON	NONE	1	R-0001
3	INSULATOR A	TEFLON	NONE	1	T-0424
2	CENTER CONTACT A	BRASS	GOLD	1	C-0726
1	SHELL	BRASS	GOLD	1	A-0002

TOLERANCES
DIMENSIONS ARE IN MILLIMETER
UNLESS OTHERWISE SPECIFIED

.X	±0.2
.XX	±0.1
.XXX	±0.05
ANGLES	±5°

SCALE	4/1	ISSUE	A-2

TITLE: SMA R/A PLUG TO JACK ADAPTOR

PART NO. 19-36-50Ω

DRAWN NO. 19-0042

FILE PATH:

APPROVED DATE

CHECKED DATE

DRAWN DATE